


■ Features

- Through bulkhead type BNC coaxial Glass Hermetic Connector
- Stainless Metal Housing – Low possibility of corrosion
- Superior Airtight (1.0×10^{-10} Pa m³/sec or less) with glass-sealed, and it maintains high reliability.

■ Structure and Surface treatment

- Flange of shell is groove for O-ring
- Flange of shell is finished surface with nickel plating


■ Parts Number

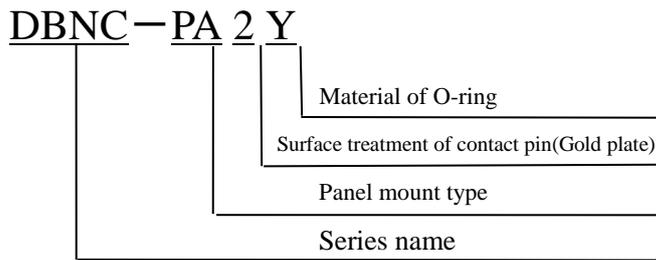

Y	Material of O-ring
1	silicon
2	Nitrile
3	Fluorine
4	Others

■ Electrical characteristic

Characteristic impedance	50Ω
Insulation resistance	1000MΩ or higher (at DC500V)
Dielectric withstanding voltage	AC500Vrms

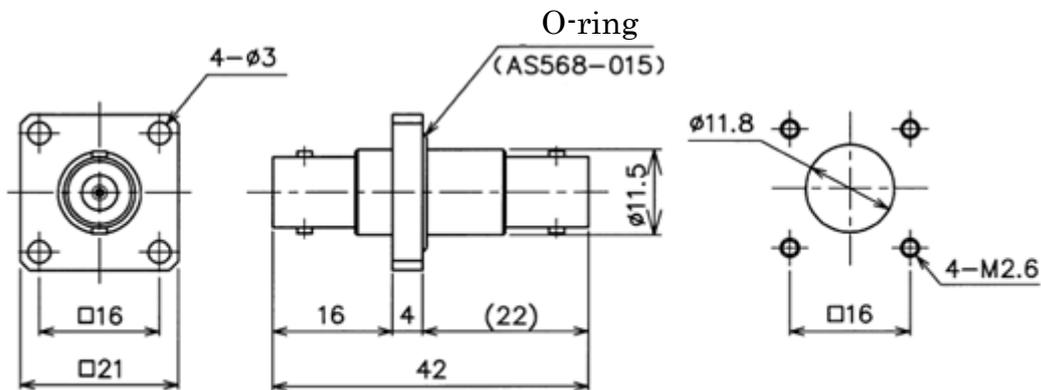

High pressure side Low pressure side

Recommended mounting dimensions
(Unit: mm)

- Please contact us for custom requirements such as material, mounting dimensions, shape, high pressure specifications, etc.
(Floating type of production is also available)
- Please ask us if the pressure direction is reversed.
- Please note that the product specifications are subject to change without notice due to improvements, etc.