

An ideal HD camera solution for various specialty applications



Lens is not included in GP-KH232A series

1/3 type 1MOS Full HD Remote Head Camera with 1080p HDMI

Key Features

- 1/3 type Full HD single MOS sensor
- 1080/59.94p, 50p resolution at HDMI output
- 900 TV lines (typical) at horizontal resolution
- Multi-format:
 (59.94Hz) 1080/59.94p, 59.94i, 29.97p (sF), 720/59.94p, 480/59.94p, 59.94i
 (50Hz) 1080/50p, 50i, 25p (sF), 720/50p, 576/50p, 50i
- Various video outputs: HDMI, RGB/YPbPr, S-video (GP-KH232CUA)
 HDMI, RGB/YPbPr, SDI (GP-KH232CSA)
- Synchronization: Internal or External
- Required illumination: 2000 lx at F8
- Minimum illumination: 5 lx at F1.4
- 3 Scene files allow to register each of adjustable parameter settings in accordance with an installation location.
- Other functions: Camera title, ELC, Electronic shutter, Gain adjustment, Electronic sensitivity enhancement, White balance, Electronic zoom (up to x2.5), Freeze, Flip, Mirror, Status display
- External control of RS-232C signal level compliant
- HD camera cable can be selected from 2 m (6.6 ft.) / 4 m (13.1 ft.) / 6 m (19.8 ft.) / 15 m (49.2 ft.)
- Small camera control unit (GP-KH232CUA/GP-KH232CSA):
 120 (W) x36 (H) x157 (D) mm (4-3/4 (W) x1-13/32 (H) x6-3/16inches)
- Compact and lightweight camera head (GP-KH232HA):
 28 (W) x27 (H) x39 (D) mm (1-3/32 (W) x1-1/16 (H) x1-17/32inches),
 48g (0.11 lbs)

Recommended lenses

(As of February, 2014)

Model		Manufacturer
DF6HA-1B	HF25HA-1B	FUJIFILM
HF9HA-1B	HF35HA-1B	
HF12.5HA-1B	HF50HA-1B	
HF16HA-1B		

* A lens whose projection length of the lens mount section is 7 mm (9/32inches) or less shall be used.


* The recommended C-mount lens aperture ranges from F2.8 to F16.



GP-KH232A Components

HD Camera Control Unit GP-KH232CUA GP-KH232CSA 	HD Camera Cable GP-KC232G02 (2 m (6.6 ft.)) GP-KC232G04 (4 m (13.1 ft.)) GP-KC232G06 (6 m (19.8 ft.)) GP-KC232G15 (15 m (49.2 ft.)) 
HD Camera Head GP-KH232HA 	


System Block Diagram

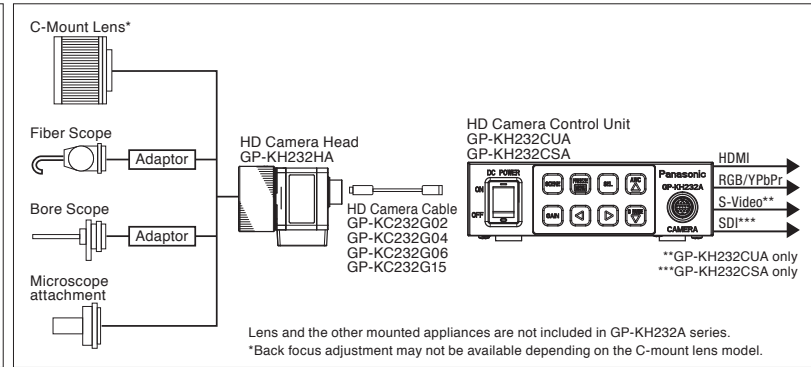


Specifications

Frame Frequency	59.94 Hz	50 Hz
Power source	12 V DC $\pm 10\%$	
Power consumption	Approx. 7.8 W (including camera head) (GP-KH232CUA) Approx. 8.8 W (including camera head) (GP-KH232CSA)	
Image sensor	1/3 type Full HD MOS	
Synchronization	Internal or external synchronization	
Video output		
S-video output (GP-KH232CUA only)	S-video connector x 1 Y: 1.0 V [p-p] / 75 Ω C: 0.286 V [p-p] / 75 Ω	S-video connector x 1 Y: 1.0 V [p-p] / 75 Ω C: 0.3 V [p-p] / 75 Ω
RGB/YpPr output	D-sub 9-pin connector x1 G: 1.0 V [p-p] / 75 Ω R, B: 0.7 V [p-p] / 75 Ω Y: 1.0 V [p-p] / 75 Ω Pb, Pr: 0.7 V [p-p] / 75 Ω	
HDMI output	HDMI connector x 1	
SDI output (GP-KH232CSA only)	BNC connector x1	
Video format		
S-video output (GP-KH232CUA only)	480/59.94i	576/50i
RGB/YpPr output	1080/59.94i, 1080/29.97p (sF), 720/59.94p, 480/59.94p, 480/59.94i	1080/50i, 1080/25p (sF), 720/50p, 576/50p, 576/50i
HDMI output	1080/59.94p, 1080/59.94i, 1080/29.97p (sF), 720/59.94p, 480/59.94p, 480/59.94i	1080/50p, 1080/50i, 1080/25p (sF), 720/50p, 576/50p, 576/50i
SDI output (GP-KH232CSA only)	1080/59.94i, 1080/29.97p (sF), 720/59.94p, 480/59.94i	1080/50i, 1080/25p (sF), 720/50p, 576/50i
Required illumination	2000 lx (3200 K, F8)	
Minimum illumination	5 lx (F1.4, GAIN: HIGH, 30 % output, at center)	
S/N	54 dB (at output using 1080i)	
Horizontal resolution	900 TV lines at center (typ. when 1080i output)	
Functions	Camera title, ELC, Electronic shutter, Gain adjustment, Electronic sensitivity enhancement, Output signal, Scene file, White balance, Electronic zoom, Freeze, Flip, Mirror, Status display	
External control	$\varnothing 3.5$ mini jack (3-pole, RS-232C signal level compliant)	
Ambient operating temperature	0 °C to 40 °C (32 °F to 104 °F)	
Ambient operating humidity	30 % to 90 %	
Dimensions	GP-KH232CUA / GP-KH232CSA	120 mm (W) x 36 mm (H) x 157 mm (D) (4-3/4 inches (W) x 1-13/32 inches (H) x 6-3/16 inches (D)) (excluding rubber feet and projections)
	GP-KH232HA	28 mm (W) x 27 mm (H) x 39 mm (D) (1-3/32 inches (W) x 1-1/16 inches (H) x 1-17/32 inches (D)) (excluding the tripod mount base and projections)
Mass	GP-KH232CUA	Approx. 660 g (1.46 lbs.)
	GP-KH232CSA	Approx. 680 g (1.50 lbs.)
	GP-KH232HA	Approx. 48 g (0.11 lbs.)
Finish	Ivory color coating	

Appearance

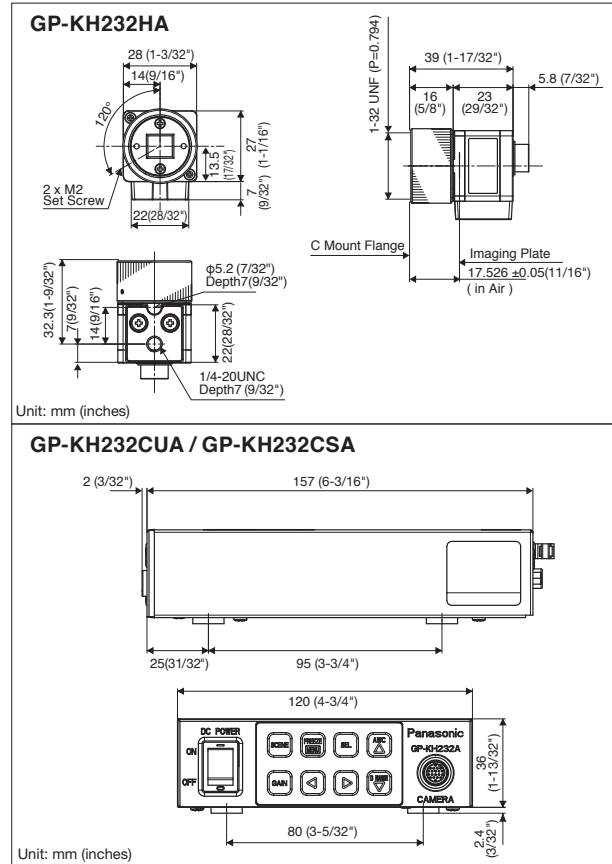

Part Names and Functions

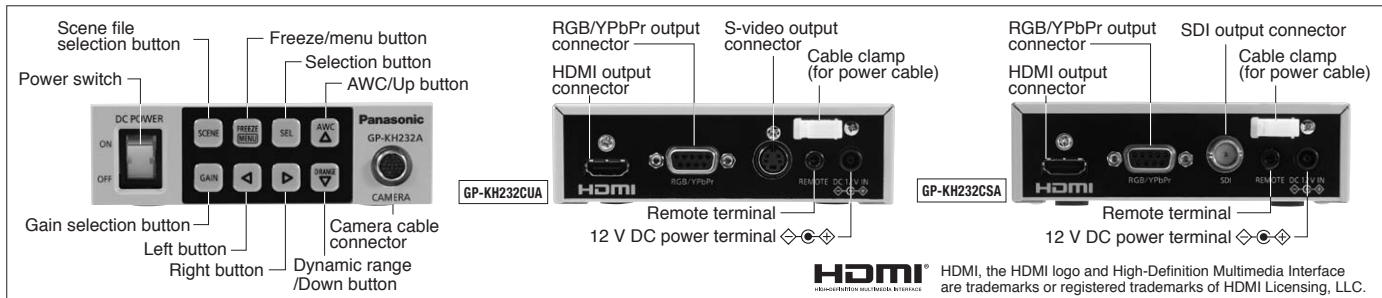

Important

- Safety Precaution: Carefully read the Important Information, Installation Guide and operating instructions before using this product.
- These products do not have medical standard approvals.
- This product is intended for usage in general electronics applications.
- The usage of this product for special purposes, such as traffic control instruments, transportation instruments, and medical instruments, may be prohibited without authorization under the applicable laws and regulations of each country or region where this product is in practical use.
- The arrangement for the authorization shall be made under customer's or user's own responsibility.

- Masses and dimensions are approximate.
- Specifications are subject to change without notice.

Panasonic

<http://security.panasonic.com>

Printed in Japan (3A-004AL)