



SRM-24 Series

24" Sunlight Readable HD LCD Monitors

- True Sunlight-Readable HD Monitor
- 1,000 Nits Brightness
- Full HD Resolution: 1920 x 1080 (1080p/60)
- LED Backlights
- Dual Speakers
- Video Inputs: VGA, DVI, HDMI, S-Video, BNC
- Lockable On-Screen Display (OSD) Controls
- Can Be Customized To Meet Your Needs
- 3 Year Warranty

The SRM-24 Series Sunlight Readable HD LCD monitors are designed to operate in direct bright sunlight, or in other high ambient-light conditions. These state-of-the-art monitors produce over 1,000 nits of brightness (vs. 150-200 nits for standard laptops). This results in amazingly bright, crystal-clear HD images, even with direct, bright sunlight on the face of the screen. The SRM-24 Series Sunlight Readable monitors are ideal for use in a wide range of industrial, law enforcement, aviation, marine, military, inspection, advertising and transportation applications where viewability in direct bright sunlight is crucial.


All TRU-Vu industrial LCD monitors are specifically designed for use in demanding applications. Every TRU-Vu monitor utilizes industrial-grade components and high-end LCD panels not found in retail/consumer-grade monitors. This ensures superior image quality, improved performance and greater durability. Our 3-Year Warranty ensures you of reliable worry-free operation. Visit www.TRU-VuMonitors.com for more details.

Specifications			
MODEL	SRM-24P	SRM-24R	SRM-24R-MV
LCD Panel	24" TN Panel		24" MVA Panel
Resolution	1920 x 1080 (1080p/60 Full HD)		
Viewable Area	20.91" x 11.47"(H) (531.36 x 298.9 mm)		
Pixel Pitch	0.277mm		
Display Colors	16.7 M		
Aspect Ratio	16:9		
Brightness	1,000 nits		
Contrast Ratio	1000:1		
Viewing Angle	170° (H) x 140° (V)		178° (H) x 178° (V)
Response Time	5 ms Trf		25 ms Trf
Control	OSD (On-Screen Display) via Pushbuttons		
Video Inputs	DVI-I, S-Video, BNC	VGA, HDMI, DisplayPort	
Audio	Dual Rear Speakers		Optional
Power Requirement	12 VDC / 90-240 VAC with Included Power Brick		
Power Consumption	45 Watts		
Enclosure	ABS		
Mounting	Via Included Base or 100 x 100 mm / 200 x 100 VESA Mount		
Operating	14° to 122°F / -10 to 50° C		
Shock	50G (20 msec, 1/2 sine) +/-X, +/-Y, +/-Z		
Vibration	1.5G RMS, 10-200 Hz, 30 mins each Axis (X, Y, Z)		
Dimensions	22.68"(W) x 13.55"(H) x 2.44"(D) / 576.1 (W) x 344.3 (H) x 62.10 (D) mm		
Weight	12.75 lbs. / 5.78 kg		
Included Accessories	DVI & Audio Cables; VGA Adapter; DVI-to-HDMI Cable; Tabletop Base	VGA, HDMI & Audio Cables; HDMI-to-DVI Cable; Tabletop Base	VGA & HDMI Cables; Tabletop Base

SRM-24 Series

24" Sunlight Readable HD LCD Monitors

Dimensions:

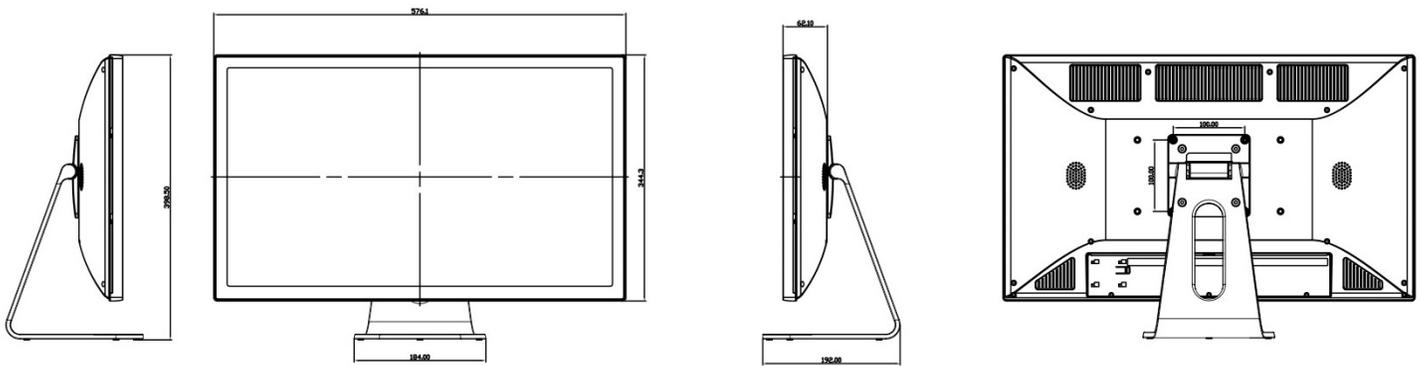

Standard Accessories:

- 90-240 VAC Power Brick
- Tabletop Base
- VGA Cable

Available Options:

- Remote Control
- Optical Bonding & Anti-Reflective Glass
- 24 VDC Operation
- Open-Frame Configuration
- Touch Screen
- Waterproof Enclosure
- Ambient Light Sensor
- Wall Mount Bracket
- Other Customer – Specific Modifications